

Phoenix Convector Range



Handcrafted in Devon

WOODWARM
STOVES 

Phoenix Convector Range

Introducing the Phoenix Convector Range.

These stylish stoves retain all the features of the Phoenix Range, with the added benefit of reduction in distance to combustibles, typically 100mm to the side and 150mm to the rear.

This is achieved with a 3 sided heatshield encasing the stove. Convection holes in the top of the stove enable more heat to radiate in to the room.



◀ The Fireblaze 6kW Convector

The largest of the convector range, the Fireblaze 6kW is a stunning contemporary stove. Fully approved for smoke controlled areas. The Fireblaze runs on 127mm flue and is available with integral log store style base.

▲ The Firegem 5kW Convector

A slender stove giving less protrusion into the room. The Firegem convector is approved for smoke controlled areas and is available with the integral log store style base and 127mm flue outlet. As with the other two stoves in the range the Firegem is suitable for a superimposed 12mm hearth.



All stoves are approved for smokeless areas and have an A+ energy rating.

Handcrafted in Devon

◀ The Firewren 4kW Convector

The smallest of the range, suitable for the home, garden rooms, lodges & boats. Shown here on the integral log store style base, giving overall height of 835mm. Fully approved for smokeless areas. The stove runs on a 127mm flue. Features include full riddling multifuel grate and separate ashpan for easy riddling.

Phoenix Convector Range Sizes

(kW) For kilowatts, All dimensions are in mm. Please remember to add 40mm to height for the Flue collar.

Model	Firewren 4kW	Firegem 5kW	Fireblaze 6kW
Max Log Length (in mm)	310	440	440
Overall Height			
Profiled Flat Top Standard	635	635	635
Profiled Flat Top Tall Version	835	835	835
Overall Width at Widest Point			
Profiled Flat Top Standard	472	602	602
Profiled Flat Top Tall Version	472	602	602
Overall Depth At Deepest Point			
Profiled Flat Top Standard	391	327	391
Profiled Flat Top Tall Version	391	327	391
Flue Outlet Size	127	127	127
Height to the centre of the Rear Flue Tall Version	678	678	678
Height to the centre of the Rear Flue	480	480	480
Top flue centre from the rear of the stove	122.5	122.5	122.5
Efficiency % (solid fuel)	75.4	75.4	75.6
Efficiency % (Wood)	84.3	82.9	82.9
Energy Rating	A+	A+	A+
Distance to combustibles Top	1000	1000	1000
Distance to combustibles Side	100	100	100
Distance to combustibles Rear	150	150	150



Please Note: To achieve the above distances to combustibles a twin skin flue system including a double wall starter section must be used. There is no Rear Flue Adaptor option for these models but a Twin Skin Rear Flue T adaptor can be used.

Please Note: The illustrations in this brochure do not necessarily comply with local building regulations. Woodwarm Stoves are all defined as class 1 appliances. Fuel is not to be stored under or around any stove while the stove is in use. All measurements are approximate.

Metal Developments Ltd reserve the right to change their specifications at any time.




The Firewren 4kW



The Firegem 5kW



The Fireblaze 6kW

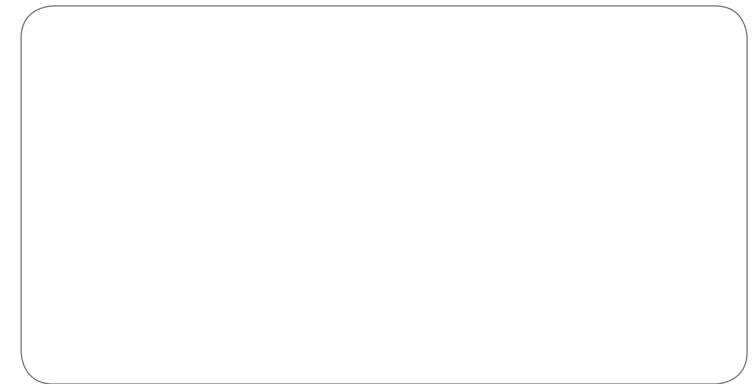

Metal Developments Ltd. The Workshop, Wheatcroft Farm, Cullompton, Devon EX15 1RA
Telephone: **01884 35806** Fax: **01884 35505** Email: sales@woodwarmstoves.co.uk
www.woodwarmstoves.co.uk

WOODWARM
STOVES 